


# ICA115-36M

## Monocrystalline 115W

Powered by high-efficiency MONOCRYSTALLINE cells, this series of high performance modules provides the most cost-effective solution for lowering the LCOE of any PV systems large or small

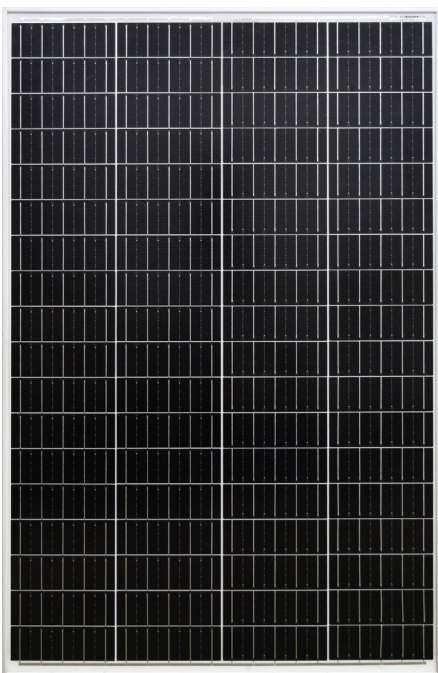

### ELECTRICAL CHARACTERISTICS

Max. Power (W)	115
Efficiency (%)	16.82
Max. Power Voltage, $V_{mp}$ (V)	18.80
Max. Power Current, $I_{mp}$ (A)	6.12
Open Circuit Voltage, $V_{oc}$ (V)	23.00
Short Circuit Current, $I_{sc}$ (A)	6.48
Weight (kg)	7.70
Dimension of module (mm)	1020 x 670 x 30
$P_{max}$ Temperature Coefficient (%/°C)	-0.45
$V_{oc}$ Temperature Coefficient (%/°C)	-0.32
$I_{sc}$ Temperature Coefficient (%/°C)	+0.06
Maximum System Voltage (VDC)	700
Maximum Series Fuse Rating (A)	15
Operating Temperature (°C)	-45~+80
NOCT (°C)	45±2

STC: 1000W/m<sup>2</sup>. AM1.5 and 25°C cell temperature

Specifications subject to change without prior notice



(IEC 61215, 61730)

